


# Clevis Mount Assemblies

## Standard Features

- Mild steel
- Assembly used in the ITCM
- Adapts rod to rod-end ball joint
- Provides electrical isolation for load cell protection
- Elimination of unwanted side loads
- Optional stainless steel provides enhanced corrosion resistance

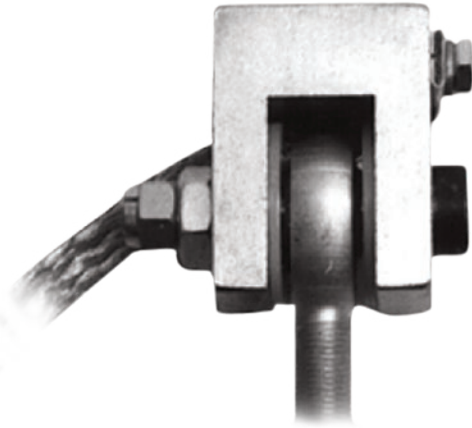

## Part Number/Price

Part #	A	B	C	D	Thread Size	Safe Load*	Price
<b>Mild Steel with Bolt</b>							
17792	0.52 in	2.38 in	1.94 in	0.38 in	3/8-16 UNC	300 lb	Consult
17793	0.52 in	2.38 in	1.94 in	0.38 in	1/2-13 UNC	300 lb	Consult
17783	0.39 in	1.81 in	1.69 in	0.25 in	1/2-13 UNC	500 lb	Consult
17784	0.65 in	2.68 in	2.31 in	0.50 in	3/4-10 UNC	4,000 lb	Consult
17785	0.78 in	3.37 in	3.00 in	0.62 in	1-8 UNC	10,000 lb	Consult
17786	0.39 in	1.81 in	1.69 in	0.25 in	3/8-16 UNC	500 lb	Consult
17787	0.65 in	2.68 in	2.31 in	0.50 in	1/2-13 UNC	2,000 lb	Consult
17788	0.65 in	2.68 in	2.31 in	0.50 in	5/8-11 UNC	2,500 lb	Consult
17789	0.78 in	3.37 in	3.00 in	0.62 in	3/4-10 UNC	5,000 lb	Consult
<b>Mild Steel with Pin</b>							
17790	1.39 in	4.12 in	4.50 in	1.00 in	1 1/4-7 UNC	15,000 lb	Consult
17791	1.22 in	4.12 in	5.00 in	1.25 in	1 1/2-6 UNC	20,000 lb	Consult
<b>Stainless Steel with Pin</b>							
33644	0.52 in	2.38 in	1.94 in	0.38 in	1/2-13 UNC	300 lb	Consult
33643	0.39 in	1.81 in	1.69 in	0.25 in	1/2-13 UNC	500 lb	Consult
33641	0.39 in	1.81 in	1.69 in	0.25 in	3/8-16 UNC	500 lb	Consult
33658	0.52 in	2.38 in	1.94 in	0.38 in	3/8-16 UNC	500 lb	Consult
33642	0.65 in	2.68 in	2.31 in	0.50 in	3/4-10 UNC	4,000 lb	Consult
33640	0.65 in	2.68 in	2.31 in	0.50 in	1/2-13 UNC	2,000 lb	Consult
33639	0.65 in	2.68 in	2.31 in	0.50 in	5/8-11 UNC	2,500 lb	Consult
33638	0.78 in	3.37 in	3.00 in	0.62 in	3/4-10 UNC	5,000 lb	Consult

\*Do not exceed the safe load

